

NIBE S-Series heat pumps











What is the Renewable Heat Incentive?

GET PAID TO GENERATE HEAT

The Renewable Heat Incentive (RHI) is a government-backed financial incentive scheme designed to encourage UK homes to swap to renewable heating systems. Under the RHI, heat pump system owners are rewarded for the renewable heat they generate over a seven-year period.

HOW MUCH COULD YOU EARN?

How much you could earn depends on the technology you choose and the tariffs set out by the government (measured in pence per kilowatt-hour for the renewable heat produced).

Payment calculations are based on an estimate of how much heat your home will require from a renewable heating system and how it will perform once installed. As well as the technology itself, performance will also depend on other factors, such as insulation levels and the heat emitters your system uses (for example, low-temperature underfloor heating is likely to be more efficient than traditional radiators).

Before applying for RHI payments you will need an up-to-date Energy Performance Certificate (EPC), which shows how efficient your property is. If your EPC recommends loft and cavity wall insulation it must be installed, and the EPC replaced prior to applying. There are some circumstances under which you may be exempt from this requirement for which you must submit evidence

EXAMPLE

A NIBE GSHP fitted in a typical three bedroom house could generate annual payments of around £2,473 per year.*

10.92P/KWH

AIR SOURCE HEAT PUMP

A NIBE ASHP fitted in a typical three bedroom house could generate annual payments of around £1192 per year.*

21.29P/KWH


GROUND SOURCE
HEAT PUMP

A NIBE GSHP fitted in a typical three bedroom house could generate annual payments of around £2473 per year.*

WHO IS ELIGIBLE?

Anyone who retrofits an air source or ground source heat pump in a single domestic property is eligible for RHI payments (whether they are an owner-occupier or private/social landlord). Self-build properties are the only new-build installations that are eligible.

To qualify for RHI payments, your system needs to have been fitted by an installer who has the right training and accreditation under the Microgeneration Certification Scheme (MCS). Opting for a NIBE Pro Installer gives you complete peace of mind, as not only are all NIBE Pro Installers fully MCS-accredited, they can also offer an extended warranty on certain products – so it pays to make sure you deal with the experts.

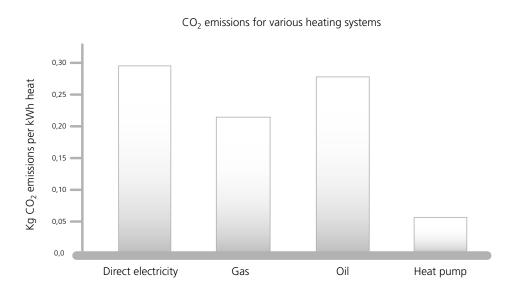

Start with a heat pump from NIBE

When making the switch from fossil fuels to renewable energy, you will experience benefits across the board. Not only will you do the environment a favour, you will save money by doing so.

With a heat pump from NIBE, you can create a perfect indoor climate by using renewable energy from your local surroundings. It immediately starts to deliver an environmental payback in the form of reduced energy consumption and emissions.

Since electricity is not the main energy source for the heat pump, the amount of electricity required is relatively low. It is only needed to drive the pump and enable the heat extraction process, allowing you to save up to 75% of your energy costs. With energy prices continually rising, you're unlikely to regret your decision. In fact, you'll start enjoying savings from the first month.



Welcome to NIBE's smart future!

The world is changing. Continuing technological development means a better future for everyone. NIBE is now taking the next step towards the future of heat pump technology with the launch of the NIBE S Series.

In today's smart homes, everyday technology is no longer sufficient. Devices that were previously incompatible online are now part of an intelligent network, designed to be smart and efficient.

A new digital platform is being launched, making life easier for both installers and end consumers. It will help to reduce costs whilst creating a perfect indoor climate, suited to everyday life. We will be a natural part of the connected home, giving our consumers greater opportunities to save energy for a greener, healthier world.

This is a technological advancement that will provide opportunities we cannot yet understand. At the same time we're future-proofing our products for the smart home.

NIBE works in-house with its own innovators and developers. The team has worked hard on the technological development – with many advantages for our end users as a result.

The heat pumps have a new design with a touchscreen and a new interface. The design is stylish and has a Scandinavian presence throughout.

In a smart home, wifi is standard. Naturally, this also applies to our new heat pumps, which no longer need to be connected via a cable.

With continuous technological advancement, we don't know exactly what we will be connecting to our heat pumps in 10 years' time. But whatever it is, we must ensure we have the product capability. One of the major advances we can see today is the improved efficiency of communication between the user and installer. It's also becoming easier, faster and more reliable for installers to troubleshoot remotely. It's now easy to diagnose disruptions without needing to be near the heat pumps.

Today's heat pumps are constantly becoming easier to connect to. In the future, it will be possible to combine existing and new energy sources, creating different system solutions.

To maintain our position at the leading edge of heat pump technology, we are continuing to develop smarter solutions that can be connected, identify needs and create opportunities in the right place at the right time. And in everything we do, we prove that the future is in our nature.

It's easy to be smart

The demands of everyday life are constantly growing. We're about to make it easier for you.

The S Series from NIBE features an elegant new look with a push-toopen aluminium door. A touchscreen control lets you swipe through the updated interface. With integrated wireless connectivity, you can connect your unit anywhere, anytime. It also has support for voice assistants, making it a natural part of your connected home.

The connected online system makes sure everything runs smoothly. By adjusting the temperature to your daily patterns, you get maximum comfort and minimum energy consumption. Both cheaper and greener. All you have to do is sit back and relax.

We make it easy to be smart.



Always updated

The NIBE S Series is a step into the future of digitalisation.

As technology develops, there are new opportunities to connect and optimise our daily lives. NIBE is now taking a great step in making heat pumps the heart of the smart home.

With an integrated wifi connection and the new myUplink app, you can control your indoor climate in a way suited to you.

NIBE are constantly working to develop the software in your heat pump. When it's time to update your software, our new technology platform enables us to send an update directly to your NIBE heat pump. All you need to do is authorise the update on your heat pump's touchscreen. The latest software is always available at the press of a button. This helps to optimise operations and maximise energy savings.

The NIBE S Series easily becomes a natural part of your smart home, both now and in the future.



Get a connected future with myUplink

The myUplink app allows you to control your smart heat pump from your smart phone.

With the launch of the smart S Series, the newly developed myUplink app is also released, the key to your smart home and a connected future.

Simplicity and clarity have been leading principles in the development of myUplink. You will be able to find what you need instantly, without having to search around in the product display menu.

Via the new, simplistic, Scandinavian-designed interface, you can retrieve real-time data from your heat pump, monitor your installation from your smart phone or tablet and ensure that your heat pump is working flawlessly. Smart Price Adaption*, software updates, monitoring, alerts and weather forecast control are included as standard.

A premium subscription allows you to easily control and adjust your smart heat pump's settings, wherever you are. A premium subscription is also required for the IFTTT and voice assistant services.

By allowing you control over your hot water and indoor climate, the app also helps you to make energy savings. Good for the environment and good for your wallet.

myUplink is an important element of our future products, and will be updated with new functions that increase comfort and reduce energy consumption.

Using a heat pump has never been easier.







myUplink

Using the Internet and myUplink you can get a quick overview of the status of your heat pump and the heating in your property. This flexible solution allows you to easily monitor and control your heating and hot water production. If your system is affected by an operational disturbance you receive an alert via a push-message and an email, allowing you to react quickly.

- An efficient tool that gives you quick and easy control over your property's heat pump, no matter where you are.
- Clear, easy to use system for monitoring and controlling heating and hot water temperatures for maximum comfort.
- Stores your heat pump's operational data, presented in a user-friendly graph.

A free web-based service that enables you to make full use of your smart home technology. Connect products and services in your home for maximum comfort.

SMART PRICE ADAPTION*


IFTTT


This clever feature gives you the option to choose variable pricing for your energy plan. You can then automatically purchase energy when the price is low, and use self-produced or stored energy when the price is high.

WEATHER CONTROL

Weather control allows your heat pump to adapt to the weather forecast, a particularly good feature when weather changes rapidly. The smart heat pump is more proactive and knows when there's a predicted weather change, effectively managing the temperature change accordingly.







Ground source heat pumps

Ground source heat is pure, stored solar energy harvested from deep within the ground, the bottom of lakes or simply just below your lawn.

By using renewable energy you will reduce your energy costs and ${\rm CO_2}$ emissions substantially. With the addition of various accessories, our ground source heat pumps can do much more than merely heat your home and hot water. For example, they can be used to cool your home in summer, ventilate it cost-effectively, or even heat your swimming pool. The relevant accessories are designed to fit neatly together, giving the appearance of a single streamlined system. Since all accessories are controlled via the heat pump, you only have to learn to use one operating system.

PRODUCTS

Ground source units

S1255

S1155 F1345

F1355

NIBE S1255

The NIBE S1255 is an intelligent, inverter-controlled ground source heat pump with integrated water heater. NIBE S1255 provides optimum savings since the heat pump always performs efficiently and automatically adapts to your home's heating demand all year round. NIBE is a leading player in the field of inverter technology, with many years' experience of variable output ground source heat pumps and one of the widest product ranges on the market.

The NIBE S1255 has a high seasonal performance factor, resulting in minimal operating costs. The heat pump is available in two different output sizes: 1.5-6 kW and 3-12 kW and is suitable for both small and large properties.

With integrated wifi, the S Series is a natural part of your connected home. Smart technology adjusts the indoor climate automatically while you're in complete control from your phone or tablet. Giving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.







for heating.

The system's efficiency class The product's efficiency class and tap profile for hot water.

- Two output sizes and leading inverter technology for optimum customization.
- Optimal seasonal performance factor and minimal operating costs.
- User-friendly touchscreen and integrated wireless connectivity with smart energy saving technology for maximum comfort.

NIBE S1255		1,5–6 kW	3–12 kW	
Space heating efficiency class 35°C / 55°C ¹⁾	A+++/A+++			
Space heating efficiency class of the system 35°C / 55°C ²⁾	A+++/A+++			
Efficiency class hot water / charging profile 3)	A/XL			
Nominal heating output (P _{designh})	kW	6	12	
SCOP _{EN14825} cold climate, 35°C / 55°C		5.5 / 4.1	5.4 / 4.3	
SCOP _{EN14825} average climate, 35°C / 55°C		5.2 / 4.0	5.2 / 4.1	
Output data according to EN 14511 nominal 0/35 – Rated output	kW	3.15	5.06	
Output data according to EN 14511 nominal 0/35 – COP _{EN14511}		4.72	4.87	
Sound power level (L _{WA}) according to EN 12102 at 0/35	dB(A)	36 – 43	36 – 47	
Rated voltage		230 V ~ 50 Hz		
Refrigerant amout in CO ₂ -equivalent	ton	2.06	3.55	
Height / Width / Depth mm		1800/600/620		
Intergrated hot water heater		180		
Weight complete heat pump	kg	220	250	

¹⁾ Scale for the product's efficiency class room heating: A+++ - D. 2) Scale for the system's efficiency class room heating: A+++ - G. Reported efficiency for the system takes the product's temperature regulator into account. 3) Scale for efficiency class hot water: A+ - F.

NIBE S1155

The NIBE S1155 is an intelligent, inverter-controlled ground source heat pump without an integrated hot water tank, making it easy to install in properties with lower ceilings. A separate hot water tank is selected according to hot water requirements. The NIBE S1155 provides optimum savings as the heat pump automatically adjusts to your home's heating demands. NIBE is a leading player in the field of inverter technology, with many years' experience of output-regulating ground source heat pumps and one of the widest product ranges on the market.

The NIBE S1155 has a high seasonal performance factor, resulting in minimal operating costs. The heat pump is available in four different output sizes: 1.5–6 kW, 3–12 kW, 4–16 kW and 6–25 kW, and is suitable for both small and large properties.

With integrated wifi, the S Series is a natural part of your connected home. Smart technology adjusts the indoor climate automatically while you're in complete control from phone or tablet. Giving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.







The system's efficiency class for heating.

The product's efficiency class and tap profile for hot water together with VPB \$300 (applies to \$1155-6).



The product's efficiency class and tap profile for hot water together with VPB S300 (applies to S1155-12, -16, -25).

- Leading inverter technology and separate hot water tank for optimum customization.
- Four output sizes for optimal seasonal performance factor and minimal operating costs.
- User-friendly touch control and integrated wireless connectivity with energy saving smart technology for maximum comfort.

NIBE S1155		1,5–6 kW	3–12 kW	4–16 kW	6–25 kW
Space heating efficiency class 35°C / 55°C ¹⁾	A+++/A+++				
Space heating efficiency class of the system 35°C / 55°C ²⁾		A+++/A+++			
Efficiency class hot water / charging profile 3)		A/XL	A /XXL		
Nominal heating output (P _{designh})	kW	6	12	16	25
SCOP _{EN14825} cold climate, 35°C / 55°C		5.5 / 4.1	5.4 / 4.3	5.5 / 4.2	5,5 / 4,1
SCOP _{EN14825} average climate, 35°C / 55°C		5.2 / 4.0	5.2 / 4.1	5.2 / 4.1	5,2 / 4,0
Output data according to EN 14511 nominal 0/35 - Rated output	kW	3.15	5.06	8.89	12,68
Output data according to EN 14511 nominal 0/35 – COP _{EN14511}		4.72	4.87	4.85	4,68
Sound power level (L _{WA}) according to EN 12102 at 0/35	dB(A)	36 – 43		36 – 47	
Rated voltage		230V 1N	√ ~ 50Hz	0Hz 400V 3N ~ 50Hz	
Refrigerant amount in CO ₂ -equivalent	ton	2.06	3.55	3.90	4,39
Height / Width / Depth	mm	1500/600/620			
Weight complete heat pump	kg	139	167	172	205

¹⁾ Scale for the product's efficiency class room heating: A+++ – D. ²⁾ Scale for the system's efficiency class room heating: A+++ – G. Reported efficiency for the system takes the product's temperature regulator into account. ³⁾ Scale for efficiency class hot water: A+ – F.

NIBE F1345

NIBE F1345 is a powerful, flexible ground source heat pump which is available in the output sizes 24, 30, 40 and 60 kW. Up to nine NIBE F1345s can be combined in a single system to cover output requirements of up to 540 kW.

NIBE F1345 has a high seasonal performance factor, and with less than 5 tonnes CO_2 equivalent refrigerant volume per compressor module. Two large compressors make NIBE F1345 perfect for properties with larger heating requirements. The compressors are switched on and off automatically for better output regulation, a longer operating range, less wear and tear and improved reliability.





The system's efficiency class for heating 35 °C.

- Powerful, flexible system that covers output requirements of up to 540 kW.
- Reliable system with efficient output regulation and no requirement for annual inspection.
- Smart technology with user-friendly control for optimal remote control.

NIBE F1345		24 kW	30 kW	40 kW	60 kW
System's efficiency class, room heating 35/55°C ¹⁾		A+++/A++			
Product's efficiency class, room heating 35/55°C 2)		A++/A++			
SCOPEN14825 average climate, 35/55°C		4.8/3.8	4.7/3.6	4.8/3.8	4.6/3.7
SCOPEN14825 cold climate, 35/55°C		5.0/4.0	4.9/3.8	5.0/3.9	4.7/3.8
Nominal heating output (Pdesign)	kW	28	35	46	67
Output data according to EN 14511 nominal 0/35 – Capacity	kW	23.00	30.72	39.94	59.22
Output data according to EN 14511 0/35 – COP		4.65	4.44	4.49	4.32
Sound power level (LWA) according to EN 12102 at 0/35 dB(A)		47			
Rated voltage		400 V 3N ~ 50 Hz			
Amount of refrigerant in CO2 equivalent	tonnes	2 x 3.55	2 x 3.55	2 x 3.02	2 x 3.55
Height/width/depth	mm	1800/600/620			-
Weight, complete heat pump	kg	320	330	345	346

¹⁾ Scale for system's efficiency class, room heating: A+++ - G. The reported efficiency of the system also takes the product's temperature controller into account.

²⁾ Scale for product's efficiency class, room heating A++ - G.

NIBE F1355

NIBE F1355 is an intelligent and powerful inverter-controlled ground source heat pump in two sizes.

NIBE F1355 provides optimum savings since the heat pump always performs efficiently and automatically adapts to the property's output requirements all year round. NIBE is a leading player in the field of inverter technology, with many years' experience of variable output ground source heat pumps and one of the widest product ranges on the market.

NIBE F1355 has a high seasonal performance factor and an operating range of 4–28 kW or 6–43 kW. With less than 5 tonnes $\rm CO_2$ equivalent refrigerant volume per refrigeration module. Two compressors provide efficient output regulation and high reliavbility, making NIBE F1355 perfect for properties with larger heating requirements.





The system's efficiency class for heating 35 °C.

- Inverter technology for minimal operating costs and optimal seasonal performance factor.
- Efficient output regulation and high reliability for larger heating requirements.
- Smart technology with user-friendly control for easy remote control.

NIBE F1355		28	43	
Space heating efficiency class of the system 35°C / 55°C ¹⁾		A+++/A+++		
The product's room heating efficiency class 35 °C / 55 °C ²⁾		A+++/A+++		
SCOP _{EN14825} average climate, 35°C / 55°C	SCOP _{EN14825} average climate, 35°C / 55°C		5,0 / 4,0	
SCOP _{EN14825} cold climate, 35°C / 55°C	SCOP _{EN14825} cold climate, 35°C / 55°C		5,3 / 4,1	
Heating capacity	kW	4–28	6–43	
Nominal heating capacity P _{design} 35 °C / 55 °C	kW	28	45/42	
Heating capacity (P _H)	ting capacity (P _H) kW		6–43	
Heating capacity (P _H) _{EN 14511} nominal 0/35 kW		20.77	31,10	
Sound power level (L _{WA}) _{EN 12102} at 0/35	dB(A)	47		
Rated voltage	V	400V 3N ~ 50 Hz		
Refrigerant amount in CO ₂ -equivalent	ton	Upper cooling module: 3.55 Lower cooling module: 3.90	Upper cooling module: 3,02 Lower cooling module: 4,39	
Height / Width / Depth	mm	1800/600/620		
Weight	kg	335	351	

 $^{^{1)}}$ Scale for the system's efficiency class room heating: A+++ – G. Reported efficiency for the system takes the product's temperature regulator into account.

 $^{^{2)}}$ Scale for the product's efficiency class room heating: A+++ – D

Devon lodge, North Devon



It was the Goldman's vision to create an energy efficient home for the future that took advantage of the myriad technologies available, including the installation of a NIBE Ground Source Heat Pump system.

Background

A modern, energy efficient home situated in five acres of remote woodland in North Devon highlights how a Ground Source Heat Pump System plays a part in a modern energy efficient home.

The block and render property offers four bedrooms, ensuite facilities, a large dining kitchen, living area, study and utility room. Its design is such that two huge, floor to apex windows flood the property with natural light and give the impression of a floating mezzanine floor providing the upstairs of the property.

It was the homeowners' vision to create an energy efficient home for the future that took advantage of the myriad technologies available. A local NIBE Pro Installer worked with the homeowners from the planning stage of the property. They specified products and advised on all elements of its renewable energy installation including the ground source heat pump, solar photovoltaic (to generate electricity), solar thermal, under floor heating, high efficiency cylinder and heat recovery system. High quality double glazing was selected over triple glazing as the latter is much heavier and can skew visual clarity which would have hampered the woodland views from the lodge.

Solution

"A NIBE Ground Source Heat Pump was fitted to fulfil the aims and requirements of the homeowners and was specified as part of their overall wish to make their new build home as energy efficient as possible," commented the NIBE Pro Installer. "Added to the Ground Source Heat Pump was a NIBE water tank and buffer cylinder - the latter stores unused heat which is able to be drawn upon when required at a later date. Each individual element of the specification enabled us to create a home that was warm and welcoming and used the energy generated for heating, hot water and power in the most efficient way possible. NIBE products continue to be at the top of the market and provide quality, reliable solutions for our customers."

As a result of a NIBE Pro Installer being used, a seven-year warranty on all installed NIBE equipment was offered.

Results

The homeowners enjoyed a seamless installation and are now reaping the benefits of living in an energy efficient home, both aesthetically and financially. The heat recovery system makes the home much healthier eliminating condensation and the health and maintenance issues it can cause, and helps to conserve energy lowering the carbon footprint of the property.

Renewable Heat Incentive (RHI) payments are exactly as predicted coming in within £1 of the original estimate!

Ground source heat pump installed in Dollar Hills near Falkirk, Scotland



"We've lived here over a year now and the heating bills during the winter are around £200 per month, which when you take into account the fact that it's a large property with permanent heating for an indoor pool, then it works out really well,"

Background

A four-bedroom home set amidst the beautiful Dollar hills near Falkirk, Scotland is the realisation of a dream for Christopher Whalley.

Christopher and his wife Dianne set their sights on relocating to the stunning location in an 'off-grid' area near where he was born. To heat their self-build home, the Whalleys chose an energy efficient and sustainable heat pump system from NIBE.

Solution

The engineer on the project recommended Eco Coil Heating, a specialist renewable energy installer based in Glasgow. The company, which is an approved NIBE Pro Installer, designed a system involving a NIBE 24kw F1345 ground source heat pump with a 500 litre hot water cylinder to provide heating and hot water. Eco Coil Heating also supplied a NIBE Pool 40 as an accessory to heat the indoor swimming pool.

The NIBE F1345 is a heat pump that has been specifically designed for larger properties. It enables simultaneous production of heating and hot water and is ideal for use with accessories such as the NIBE Pool 40, for heating a swimming pool.

The ground source heat pump sourced its energy through three vertical bore holes, which Eco Coil Heating drilled at depths of 180m in land close to his property.

Eco Coil Heating offered a complete design, installation and commissioning service for the heat pump, which feeds the hot water system, the swimming pool, plus the underfloor heating to upstairs and downstairs of the four bedroom home. To make it even more sustainable, the house has 30 solar panels integrated into its roof.

NIBE's ground source heat pumps can be coupled with various accessories, such as comfort cooling and ventilation. All NIBE heat pump systems come with a seven-year warranty when installed by a NIBE Pro Installer.

Results

"We've lived here over a year now and the heating bills during the winter are around £200 per month, which when you take into account the fact that it's a large property with permanent heating for an indoor pool, then it works out really well," said Mr Whalley.

He adds: "It is reassuring to know that we have a heating system that is sustainable but affordable for the future too." Mr and Mrs Whalley will also benefit from RHI payments for his heat pump.

Stephen Craig from Eco Coil Heating said: "A large domestic project like this requires a close working relationship between the client, ourselves and the builder.

Air source heat pumps

Thanks to the endless supply of air, one of nature's free and renewable energy sources, you will be able to maintain a perfect indoor climate for many years to come.

Heat pump technology is based on a very simple, well-known principle. Using a vapour compression cycle, it works in a similar way to any domestic refrigerator. By extracting heat energy from the outside air, even at lower temperatures, a NIBE air source heat pump can heat your home and supply it with hot water, all year round.

The NIBE air source systems consist of an outdoor module combined with an indoor or control module. This forms a complete climate system that is easy to install, operate and maintain. The modules work with any kind of terrain and are compatible with a variety of energy sources, and additional solutions for ventilation and pool heating can be added to the system.

PRODUCTS Outdoor Modules NIBE F2040

Indoor Modules NIBE VVM S320

NIBE SMO 20 NIBE SMO S40

NIBE 2040

NIBE F2040 is an intelligent and compact inverter controlled air source heat pump. NIBE F2040 provides optimum savings since the heat pump automatically adapts to your home's output requirements all year round.

The heat pump works down to an outdoor temperature of -20°C and at the same time supplies up to 58°C in supply line temperature.





- Compact heat pump that adapts to your home's requirements.
- High capacity even down to 20°C.
- Energy-saving smart technology with user-friendly control.

		NIBE F2040-6	NIBE F2040-8	NIBE F2040-12	NIBE F2040–16
System's efficiency class, room heating 35/55°C ¹⁾		A+++/A++	A+++/A++	A+++/A++	A+++/A++
Product's efficiency class 35/55°C ²⁾		A++/A++	A++/A++	A++/A++	A++/A++
Efficiency class, hot water/load profile 3)	A/XL – A/XXL				
SCOP _{EN14825} Average climate, 35/55°C	SCOP _{EN14825} Average climate, 35/55°C		4.4/3.3	4.4/3.4	4.5/3.4
P _{designh} Average climate 35/55°C	kW	5.0/5.0	8.2/7.0	11.5/10.0	14.5/14.0
SCOP _{EN14825} Cold climate 35/55°C		3.7/3.0	3.6/2.8	3.6/2.9	3.7/2.9
P _{designh} Cold climate 35/55°C	kW	4.0/6.0	9.0/10.0	11.5/13.0	15.0/16.0
7/35 Heat capacity/COP, EN14511, nominal	kW	2.67/5.32	3.86/4.65	5.21/4.78	7.03/4.85
Sound level (L _{WA}), EN12102 at 7/45, nominal	dB(A)	50	54	57	61
Rated voltage	V	230 V 50 Hz, 230 V 2 AC 50 Hz			
CO ₂ equivalent (hermetically sealed refrigerant circuit) ⁴⁾	tonnes	3.13	5.32	6.06	8.35
Height/width/depth	mm	791/993/364	895/1035/422	995/1145/452	1450/1145/452
Weight (excluding packaging)	kg	66	90	105	135

¹⁾ Scale for system's efficiency class, room heating: A+++ - G. The reported efficiency of the system also takes the product's temperature controller into account

account.

²⁾ Scale for product's efficiency class, room heating A++ - G. ³⁾ Scale for efficiency class, hot water: A – G. ⁴⁾ NIBE F2040 does not require annual inspection in accordance with the F-Gas Regulation.

Indoor modules

NIBE VVM S320

The NIBE VVM S320 is designed for combination with any NIBE air source heat pump to create a highly efficient climate system for your home.

The NIBE VVM S320 have a smart, user-friendly control system which provides efficient heating/cooling and hot water with high performance. The NIBE VVM S320 are a complete plug and play solution for easy installation.

With integrated wifi, the S Series is a natural part of your connected home. Smart technology adjusts the indoor climate automatically while you're in complete control from your phone or tablet. Giving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.



- Combine with a NIBE air source heat pump for a complete system.
- Smart, user-friendly control system.
- User-friendly touch control and integrated wireless connectivity with energy saving smart technology for maximum comfort.

NIBE VVM S320			
Additional power	kW	7.0	
Required heating power, coldest day		Up to 10 kW	
Tap volume 40°C during Medium		240	
Docking		High power external heat sources with external accumulators. No built-in accumulator volume.	
Connection		Тор	
Rated voltage	V	230V~50Hz	
Height / Width / Depth	mm	1800/600/622	
Weight	kg	130	
Compatible outdoor units		NIBE F2040-6 / F2040-8 / F2040-12	

NIBE SMO Control module

NIBE SMO Control modules provide a flexible solution that you can easily customise, allowing you to integrate your heat pump with both existing or new systems. Additional heat sources and other accessories are chosen specifically for the actual set-up.

The entry model NIBE SMO 20 is a perfect choice for a system with heating and hot water supply. It handles one heat pump and has a limited range of accessories. Onboard functionality supports control of charge pump, 3-step addition both for heating and hot water, main circulator pump, a switching valve for hot water and an AUX relay.

The more advanced NIBE SMO S40 can handle up to eight heat pumps. It has all the onboard functionality that NIBE SMO 20 offers, but also allows you to add extra functions, advanced dockings, and also supports an external heat source.

Docking

NIBE offers a broad range of accessories, dockings and system solutions, all to make a complete climate solution. See section on additional functions to explore how you can create the perfect indoor climate for your needs.

Choosing the right NIBE SMO for my house

	SMO 20	SMO S40	
	A11100	- NAME	
Controls up to	1 heat pump	8 heat pumps	
Self-regulating circulator pump	Available in 2 sizes, CPD11	Available in 2 sizes, CPD11	
External heat sources	3 step electrical heater	3 step electrical heater or boiler with mixing valve	
Dimensions H/W/D (mm)	410/360/110	410/360/120	
Net weight	4,3 kg	5 kg	

NIBE SMO S40 Control module

The NIBE SMO S40 is an intelligent control module, providing optimised control over your indoor climate system. Combined with one or more NIBE air source heat pumps, water heaters or additional heat sources, the NIBE SMO S40 offers a complete climate system for properties.

The NIBE SMO S40 offers maximum flexibility when it comes to system solutions. The control module can be connected to components such as a water heater, additional heat sources and other accessories, allowing for customised installations. Up to eight NIBE air source heat pumps can be connected to a control system.

The NIBE S Series is a natural part of your connected home. The smart technology adjusts the indoor climate automatically and gives you complete control from your phone or tablet. Achieving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.



- In combination with a NIBE air source heat pump a part of your energy-saving smart home.
- Property solutions with up to eight NIBE air source heat pumps.
- Smart, user-friendly system with touchscreen for maximum flexibility.

NIBE SMO S40			
Controls up to		8 heat pumps	
External heat source		3 steps for electrical heater or boiler with mixing valve Allows prioritised heating sources	
Self-regulating circulator pump		CPD11, available in 2 sizes	
Supply voltage		230V~50Hz	
Enclosure class		IP21	
Height / Width / Depth	mm	350/540/110	
Weight	kg	~ 5	
Compatible outdoor units		NIBE F2040-series	
Accessories		Wide range including additional climate system, pool, solar cell, ventilation heat exchanger, room display etc.	

Barn conversion, Honeybourne, Worcestershire



"It is reassuring to know that we have a heating system that is sustainable but affordable for the future too."

NIBE Heat Pumps | Case study

Background

Following over 30 years spent living abroad, Steve and Beverley Mullins recently returned to the UK and bought Middle Barn in the village of Honeybourne in Worcestershire. They renovated the barn and outbuildings to create a large, five-bedroom home.

The property is in a rural area, off the gas grid and the couple were looking to invest in a more sustainable form of energy. A friend recommended Luke Bernardini from Solo Heating Installations as he had installed a NIBE ground source heat pump for them and they were more than satisfied with the service.

Solution

Luke visited the property and recommended two F2040 12kw air source heat pumps from NIBE to provide heating and hot water for the barn conversion.

The NIBE F2040 is an intelligent and compact inverter-controlled air source heat pump, which provides optimum savings as the heat pump automatically adapts to a home's heating requirements all year round. The heat pump works down to an outdoor temperature of –20°C whilst still providing sufficient hot water and the perfect indoor climate. NIBE's air source heat pumps can be coupled with various accessories, such as comfort cooling and ventilation.

Results

The Mullins' system is expected to achieve a seasonal performance factor of 3:1. When you consider this, plus the income from the RHI, the heat pump should pay for itself in just three to five years.

Mr Steve Mullins said: "We've not had the heat pump installed over a winter season yet, so we can't give an exact idea of energy and cost savings yet, however we are delighted with its performance so far. Solo Heating Installations came highly recommended and we were very impressed with Luke and how he was very responsive to our requirements. He was also very attentive to detail, particularly with regards the aesthetics in the plant room. We're really pleased with the result."

He adds: "It is reassuring to know that we have a heating system that is sustainable but affordable for the future too."

Luke Bernardini from Solo Heating Installations said: "This was a really enjoyable project to work on and Mr and Mrs Mullins will benefit from a comfortable warm home, through a heating system that is affordable to run and sustainable too."

Barn conversion benefits from a load of hot air!



Scattered across the fens of Cambridgeshire are many dilapidated farm buildings that are ripe for renovation.

NIBE Heat Pumps | Case study

Background

Scattered across the fens of Cambridgeshire are many dilapidated farm buildings that are ripe for renovation.

One such barn, which was situated on family land, became a renovation project for owner Dan Houghton who embarked on the quest to create a new three bedroom home for himself and his partner and also utilise the skills he demonstrates in his occupation as a carpenter.

Whilst an alternative to main gas was clearly necessary due to the barns off grid location, it was only as planning permission was sought that it became apparent that a renewable energy source was necessary to fulfil requirements.

It was this that led Dan to a local NIBE Pro Installer, who worked with him throughout the project to specify the correct products, install the system and take care of ongoing maintenance.

Solution

Through working with the NIBE Pro Installer, from the specification stage of the project to ensure planning requirements were fulfilled and the correct products were installed to deliver warmth and hot water to meet demands, Dan opted for A NIBE F2040 8kW air source heat pump along with a 200 litre water cylinder, 40 litre buffer tank and SMO 40 controller to give domestic controls and energy monitoring.

Results

The property received its EPC certificate resulting in Renewable Heat Incentive (RHI) payments of around £800 per annum.

Not only does it support the ethos of renewable energy systems in rural locations it also demonstrates that renovation projects (from virtually derelict buildings) can also reap the benefits of such technologies.

Smart home accessories for the NIBE S-Series

For more comfortable precise indoor climate control.

NIBE's wireless accessories help you get the most out of the S-Series. What that means for you is new opportunities to improve your indoor comfort to suit your needs while consuming less energy. If you have a connected NIBE heat pump, you can already control and monitor your heating and ventilation system simply and easily using myUplink. The new smart accessories give you even greater precision and comfort.

The accessories are small units which are easily mounted on the wall and connected to your NIBE S-Series installation. You can sit back and relax while your heating installation automatically adjusts the temperature, humidity and CO_2 level – or you can adjust them manually to suit your needs.



PRODUCTS

Smart components

RMU S40

THS 10

RPP 10

CDS 10

ROT 10

Zones for a comfortable indoor climate

ZONES


Dividing your home into climate systems and zones is the basis for achieving a comfortable indoor climate with the help of the smart accessories. Start by considering your heating, humidity and air quality needs and how they differ from floor to floor and from room to room.

When you connect your smart accessories to your installation, you easily create and name your climate systems and zones. You can have up to eight climate systems, each containing a number of zones.

For example, if your house has a basement, ground floor and top floor you can decide to make each floor a climate system . If your ground floor is open plan, with a kitchen and living room, you could define two to three zones, each of them containing one or more smart accessories.



DIAGRAM SHOWING CLIMATE SYSTEMS AND ZONES.

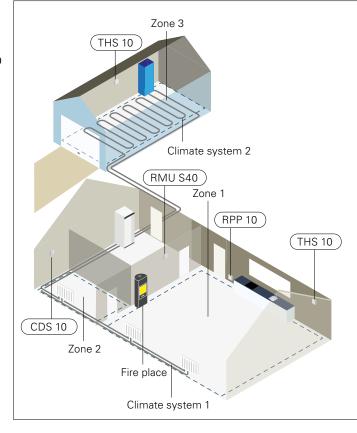

In the example to the left, a property with two climate systems is shown.

Climate system 1 is a radiator system with two zones. Zone 1 controls it. Here is an RMU S40 which gives you easy access to the heat pump that together with THS 10 allows the heat pump to adjust to the heat from the fireplace faster.

Zone 2 is set for display, which means that the temperature and humidity can be read in the myUplink app or via myuplink.com.

Climate system 2 is an underfloor heating system with one controlling zone.



ROOM UNIT NIBE RMU S40

The NIBE RMU S40 is a wireless/wired room unit* with 2.8" touch screen and built-in temperature and humidity sensors. You use it for remote control and monitoring of your NIBE S-Series heat pump, as a supplement to the myUplink app in your smartphone or tablet.

The room unit is easy to install and use. It has the same intuitive interface and design as myUplink and your heat pump. Choose a central place in your house, the kitchen perhaps, or anywhere that's convenient for you. In a large house with a lot of windows it can be a good idea to install one or more THS 10's as a complement.

The room unit also enhances the signal, improving communication between your smart home products when these are located at a distance from each other.**



NIBE's smart accessories help you get the most out of the S-Series

What that means for you is improved indoor comfort based on your needs and lower energy consumption.

THS 10 WIRELESS TEMPERATURE AND HUMIDITY SENSOR This wireless sensor allows you to read the temperature and humidity in a room or climate zone using the myUplink app. On the heat pump you can see the current room temperature or change it in °C.

THS 10 replaces the fixed indoor sensor. Because it is battery powered, it is easy to install.

Mount the thermostat in your room and connect it to your NIBE S-Series heating installation.



RPP 10 REPEATER

Enhances the signal, improving communication between your smart home products when they are placed at a distance from each other. For NIBE S-series heating installations, the repeater functions as a switch, giving you the opportunity to control it remotely, schedule On and Off times and measure energy consumption.

Plug in the repeater and connect it to your NIBE S-Series heating installation.



CDS 10 WIRELESS
CO₂, TEMPERATURE
AND HUMIDITY
SENSOR

This wireless sensor allows you to read the CO_2 , temperature and humidity level in a room or climate zone using the myUplink app. For NIBE S-series heating installations with ventilation the indoor comfort level can automatically be adjusted to give you a comfortable indoor climate. For example, you can increase ventilation and lower the CO_2 level when there are a lot of people present or lower the ventilation to further reduce your energy costs. Because it is battery powered, it is easy to install, but it can also operate with an external power source using a micro USB.

Mount the thermostat in your room and connect it to your NIBE S-Series heat and ventilation installation.




ROT 10 WIRELESS ROOM THERMOSTAT The wireless room thermostat allows you to read and control the temperature of a room or a climate zone from the display of the room thermostat or via the myUplink app in your smartphone. For instance by increasing the ventilation when you have many guests or lower the ventilation for better savings when you are not at home. Because it is powered by a rechargeable battery, it is easy to install.

Mount the thermostat in your room and connect it to your NIBE S-Series heat pump.



The myUplink app is the key to your smart home

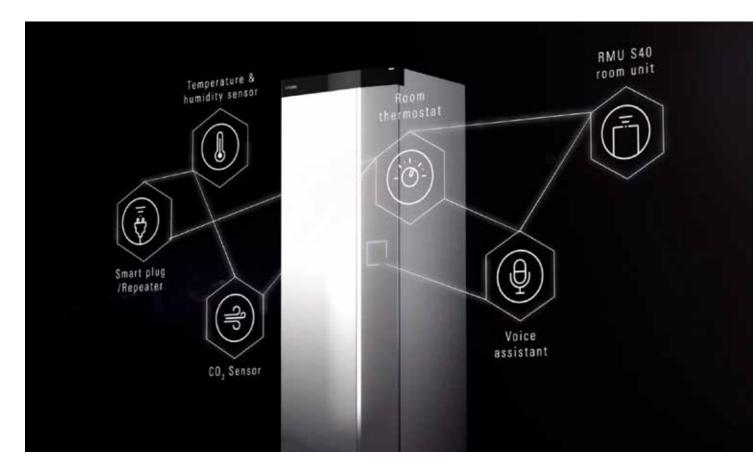



MYUPLINK

As a companion to the NIBE S-Series there is the myUplink app that is included at no extra cost.

Download the app and register to gain control of your heat pump from your smartphone or tablet, wherever you are.

You gain access to the following functions: monitoring, alarms, information on software updates, weather forecast control, historical data and Smart Price Adaption*. Some functions require a Premium subscription.





BASIC SUBSCRIPTION

The app is simple to use, with an interface you will recognise from your heat pump. It quickly provides you with a status overview of your heating system and heat pump. Here you can retrieve real time data from your heat pump. Once your smart accessories are connected to your heat pump and you have established zones, you can view the status, room by room. If your system requires your attention, you will quickly receive an alert via a push-message and an e-mail.

When you are connected to myUplink, your heat pump can easily be updated with the latest software. The download needs to be approved in the heat pump's display. The basic subscription includes weather forecast control and Smart Price Adaption.

Weather forecast control, included in the basic subscription, means that your heat pump adjusts itself according to the weather forecast, which is particularly useful when the weather changes rapidly. Your intelligent heat pump is proactive, knows when a change in the weather is coming and can cope effectively with shifts in temperature.

The Smart Price Adaption* functionality means that your heat pump works the hardest when the price of electricity is at its lowest and slows down during price peaks. Via myUplink, your heat pump gets information on the electricity prices for the coming 24-hour period and then adjusts its operations on the basis of the price and your expected heating and hot water needs.

PREMIUM SUBSCRIPTION

A Premium subscription gives you the option of controlling your heat pump and adjusting settings in the app, regardless of where you are. You also gain access to historical data and a number of intelligent services such as voice control and IFTTT, allowing you to connect smart products to each other. With your intelligent accessories, you can do this room by room.

By allowing you to control your indoor climate, the app helps you save on energy costs. Good for the environment, as well as your wallet.

Ventilation

Our home is where we find comfort, so every home needs to breathe. We provide you with the ability to optimise your ventilation, regardless of your source of energy. Integrate your ventilation unit with your heat pump to establish a complete control system with all the benefits of our smart technology.

PRODUCTS

Heat recovery ventilation

NIBE ERS S10-400 NIBE ERS 20-250 NIBE FLM S45

NIBE ERS S10-400

The NIBE ERS S10-400 is a heat recovery ventilation unit with high temperature efficiency up to 90% and low energy consumption. The heat recovery ventilation unit is used in houses with areas up to approx. 300 m².

The NIBE ERS S10-400 is designed for installation with a NIBE ground source heat pump or a NIBE air source heat pump for a complete heating and ventilation system. The heat recovery ventilation unit is easily controlled by the heat pump.

The NIBE S Series is a natural part of your connected home. Smart technology adjusts the indoor climate automatically while you're in complete control from your phone or tablet. Giving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.





- Heat recovery ventilation unit with high temperature efficiency and low energy consumption.
- Together with NIBE S Series controls, it provides a solution in houses with balanced ventilation.
- In combination with a NIBE S series heat pump or indoor module a part of your energy-saving smart home.

NIBE ERS S10-400							
Efficiency class 1)		A					
Supply voltage			230 V – 50 Hz				
Fuse	А	10					
Fan capacity	W	85 x 2					
Enclosure class			IPX1				
Filter type, exhaust air filter		Coarse					
Filter type, supply air filter		ePM1-55%					
Sound power level (L _{WA}) ²⁾	dB (A)	47					
Ventilation connection	mm	Ø160					
Connection, condensation water drain	mm	G32					
Length, supply cable	m	2.4					
Length, control cable	m	2.0					
Height / Width / Depth	mm	900/600/612					
Weight, complete heat exchanger	kg	40					
Power/current for included NIBE EAH 20-1800 (electrical preheater)	W/A	300/1.3	600/2.6	900/3.9	1200/5.2	1500/6.6	1800/7.8

¹⁾ Scale for product's efficiency class room heating A+ - G.

^{2) 295} m3/h (82 l/s) at 50 Pa.

NIBE ERS 20-250 The NIBE ERS 20-250 is a heat recovery ventilation unit with high temperature efficiency up to 90% and low energy consumption. The NIBE ERS 20 up to approx. 200 m².

> The NIBE ERS 20-250 are designed for installation with a NIBE ground source heat pump or a NIBE air/ water heat pump for a complete heating and ventilation system. The heat recovery ventilation unit is easily controlled by the heat pump.

Thanks to smart technology, the product gives you control over your energy consumption and will be a key part of your connected lifestyle. The efficient control system automatically adjusts the indoor climate for maximum comfort, and you do nature a favour at the same time.



- The heat recovery ventilation units with high temperature efficiency and low energy consumption.
- Together with the NIBE ground source or air/water heat pump, it provides an integrated solution in houses with balanced ventilation.
- Easy to control and part of your smart home in combination with a NIBE heat pump.

NIBE ERS 20-250					
Efficiency class 1)		A			
Supply voltage		230 V ~ 50Hz			
Fuse	А	10			
Driving power fan	W	100 x 2			
Enclosure class		IPX1			
Filter type, exhaust air filter		Coarse			
Filter type, supply air filter		ePM1 55%			
Sound pressure level (L _{WA}) ²⁾	dB (A)	47.4			
Ventilation Ø	mm	Ø125			
Connection condensation water drain	mm	Ø15			
Length, supply cable	m	2.4			
Length, control cable	m	2.0			
Height/width/depth	mm	241/1202/673			
Weight	kg	25			

¹⁾ Product efficiency class scale for room heating A+ to G. ²⁾ 105 m3/h at 50 Pa

NIBE FLM S45

The NIBE FLM S45 is an exhaust air module with built-in fan, specially designed for combining recycling of mechanical exhaust air with a NIBE ground source heat pump, providing an integrated solution for ventilation, hot water and heating.

The NIBE FLM S45 has a high fan capacity and low noise level. Energy is recovered from the ventilated air; even when the heat pump is not in operation. Energy is stored in the soil or rock collector, putting the exhaust air energy into maximum use.

The NIBE S Series is a natural part of your connected home. Smart technology adjusts the indoor climate automatically while you're in complete control from your phone or tablet. Giving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.



- Provides an integrated solution for ventilation, hot water and heating with ground source heat pumps.
- Efficient even when the heat pump is not in operation.
- A part of your energy-saving smart home in combination with a NIBE S series heat pump.

NIBE FLM S45					
Supply voltage		230 V ~ 50 Hz			
Driving power fan	W	175			
Enclosure class		IP21			
Maximum sound power level to ISO 12102	dB(A)	36–46			
Ventilation max airflow	m³/h	350			
Height / Width / Depth	mm	396 / 600 / 556			
Weight	kg	35			

Hot water supply

We've been manufacturing hot water comfort for more than 50 years. So regardless of your hot water needs, we have the right solution for you. Our full range of hot water solutions complement our selection of heat pumps.

PRODUCTS Domestic hot water VPB S300, VPBS S300

cylinders VPB 500-1000

Tank in tank water NIBE VPA 300/200, cylinders NIBE VPAS 300/450

Domestic hot water NIBE HA-WH5 MEGACOIL cylinders

Buffer vessels NIBE UKV 40 / 100 / 200 / 300 / 500


NIBE VPB S300 NIBE VPBS S300

The NIBE VPB/VPBS S300 are efficient hot water tanks which is designed for connection to a heat pump, gas or oil boiler. The NIBE VPBS S300 can also be docked to solar panels.

The NIBE VPB S300 and the ground source heat pump NIBE S1155 have a customised design, providing a stylish system solution with the option of concealed piping between the products. The storage tank has insulation made of polyurethane, which provides very good heat insulation.

The NIBE S Series is a natural part of your connected home. The smart technology adjusts the indoor climate automatically and gives you complete control from your phone or tablet. Achieving maximum comfort and minimum energy consumption, while doing nature a favour at the same time.





- Efficient water heater and accumulator tank designed for connection to a heat pump or other energy source.
- Stylish design for customisation with NIBE S Series heat pump with minimal heat loss.
- A part of your energy-saving smart home in combination with a NIBE S Series heat pump.

¹⁾ Scale for the product's efficiency class room heating: A+ till F.

NIBE VPA/VPAS The NIBE VPA/VPAS range are particularly suited to high capacity heat pumps such as the NIBE F1345. The NIBE VPAS has an integrated solar hot water coil.



NIBE VPB 500-1000

VPB is a range of efficient water heaters, with a wide range of applications, which are suitable for connections to heat pumps. All models are intended for properties with large hot water requirements. They can also be suitable for connection in parallel for use in larger properties.



NIBE HA-WH5 MEGACOIL

NIBE HA-WH5 Megacoil cylinders are available in three single coil versions for use with NIBE F2040 air source heat pumps ranging from 160–300 litres. The HA-WH5 Megacoil cylinders are manufactured from high grade stainless steel and come with a 25 year guarantee. Two twin coil solar versions are available in 200 and 300 litres versions providing up to 70% of the domestic hot water requirements by utilising the free energy provided by the sun.



NIBE UKV Buffer tank for heating systems

NIBE UKV 40, 100, 200, 300 and 500 are buffer tanks used together with heat pumps to increase the volume of water in the system for more stable operation.



Solar panels

Harvesting energy from sun



NIBE PV

NIBE PV is an integrated solution which is based on a fully modular system with two basic sizes: 3.6 and 7.2 kW.

NIBE PV comprises of monocrystalline silicon cell panels which use PERC half-cell technology, with an output of 360 Wp. The solar panels are elegant, all-black panels. NIBE PV harnesses sunlight all year round and converts it into electricity. NIBE PV can be connected to your NIBE heat pump* for maximum energy efficiency.

Thanks to smart technology, the product gives you control over your energy consumption and will be a key part of your connected home. The efficient control system automatically adjusts the indoor climate for maximum comfort, and you do nature a favour at the same time.

- Flexible modular system with two basic sizes which can be easily expanded.
- Elegant, all-black panels which use PERC technology for maximum efficiency.
- Connect to a NIBE heat pump for maximum energy efficiency.

Solar panel		3,6 kW	7,2 kW		
Numbers of panels		10	20		
Area	m²	18	36		
Rated output at STC (Pmpp)	Wp	360			
Rated voltage (Umpp)	V	34,3			
Rated current (Impp)	А	10,5			
External dimensions (Width x Height x Depth)	mm	1755x1038x35			
Weight	kg	21			

^{*} applies to systems which can be connected to NIBE Uplink/myUplink.

Why use a NIBE Pro Installer?



Why choose a NIBE Pro installer?

Once you've chosen the right NIBE system to meet your heating/ventilating needs, the next step is to ensure it is installed correctly so it can perform to its full potential. As a leading renewables manufacturer, NIBE understands the vital importance of quality installations, which is why we have built an extensive network of highly skilled, trusted installers across the country. Our NIBE Pro installers are fully trained and accredited to fit our products to the highest possible standards, so you can benefit from optimum results and full peace of mind. They are also MCS certified – an essential requirement to qualify for the government's Renewable Heat Incentive (RHI) payments.

NIBE PRO installers:

- Have completed NIBE product training
- Offer an extended warranty
- Have experience fitting NIBE technology
- Are MCS certified (essential requirement for RHI payments)
- Are signed up to NIBE's strict code of practice

Under NIBE's code of practice installers must:

- Perform professionally, competently and responsibly
- Comply with all relevant UK regulations, standards and codes of practice
- Install and commission all NIBE equipment in accordance with all NIBE's procedures and installation manuals
- Complete benchmark check lists for NIBE products
- Fully demonstrate correct system operation and controls to customers
- Register installations on NIBE's website
- Liaise directly with customers and respond to NIBE product enquiries in a quick and proficient manner
- Keep fully up to date with NIBE's product range as well as developments in the UK's plumbing and heating industry







The NIBE S Series

- Timeless, elegant design
- Integrated wifi connection
- Touchscreen with swipe function







- Weather control
- Wireless software updates
- A part of the smart home
- Support for voice assistants





NIBE Energy Systems Ltd Unit 3C, Broom Business Park, Bridge Way Chesterfield, S41 9QG nibe.co.uk

This brochure is a NIBE Energy Systems' publication.

All product illustrations, facts and data are based on current information on the date the publication was approved. NIBE Energy Systems is not legally bound by any factual or typographical errors in this brochure.